FREEIP

User Manual

LONGSE

For iPhone

Version V 5.1.30

Introduction:.....- 2 -
1、Installation and registration.....- 3 -
1.1、Install APP to iPhone.....- 3 -
1.2、Registered account.....- 3 -
2.Add Device.....- 5 -
2.1、Use SN code add IPC/NVR/DVR.....- 5 -
2.2、Manage Device.....- 6 -
2.2.1、How to add multiple devices; .....- 6 -
2.2.2、Delete Device;.....- 6 -
2.2.3、Device name modification.....- 7 -
2.3、Use RTSP port add IPC/NVR/DVR.....- 7 -
2.4 user【LAN Search】to add IPC/NVR/DVR.....- 8 -
3.Functions Introduction.....- 10 -
4.Playback.....- 11 -
5.FAQ.....- 11 -

LONGSE

Introduction:

Welcome to use FREEIP App.FREEIP is an IPC/DVR/NVR real-time online watch and management app for free. Simple and quick operation to allow customers to more easily experience.

1、Installation and registration

1.1、Install APP to iPhone

Use your iPhone to visit：
https://itunes.apple.com/cn/app/free-ip/id898690336?Mt=8,
download FREEIP application and Installation.So your iPhone interface will be displayed this application icon 

after successful installation。

LONGSE

1.2、Registered account

When using the FREEIP for the first time , please register for free accounts. Successful registered account just need to fill in the valid email address and initial password . Using the successful registered account to login the FREEIP.As it show in the following pictures.

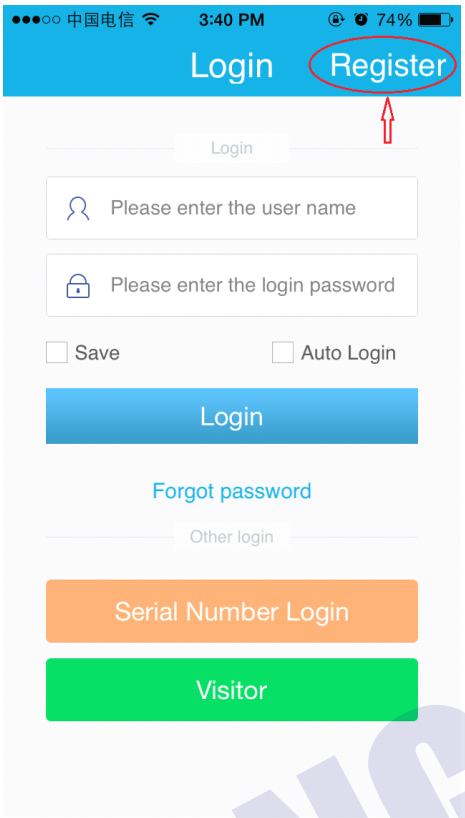
●●●○○ 中国电信 3:40 PM 74%
Login
Register
Login
Please enter the user name
Please enter the login password
Save
Auto Login
Login
Forgot password
Other login
Serial Number Login
Visitor

①

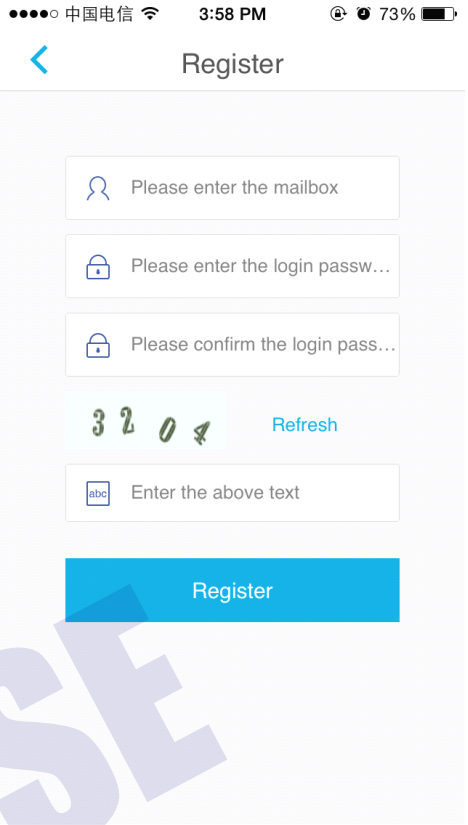
●●●●○ 中国电信 3:58 PM 73%
Register
Please enter the mailbox
Please enter the login passw…
Please confirm the login pass…
Refresh
Enter the above text
Register

②

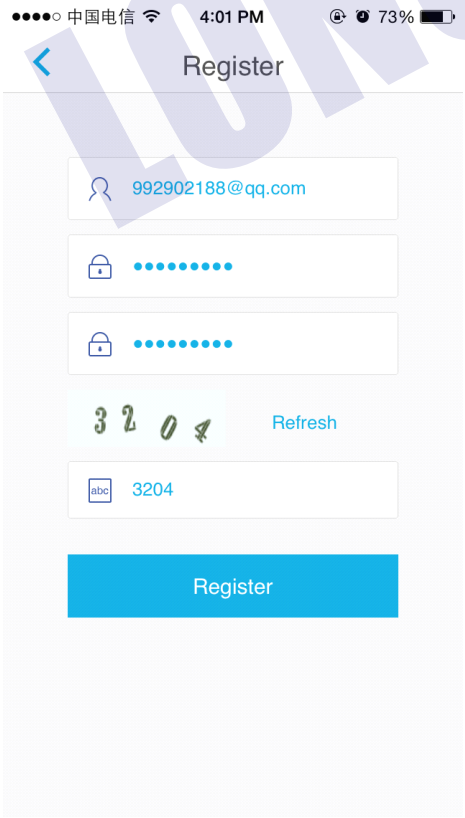
●●●●○ 中国电信 4:01 PM 73%
Register
992902188@qq.com
3204
Refresh
3204
Register

③

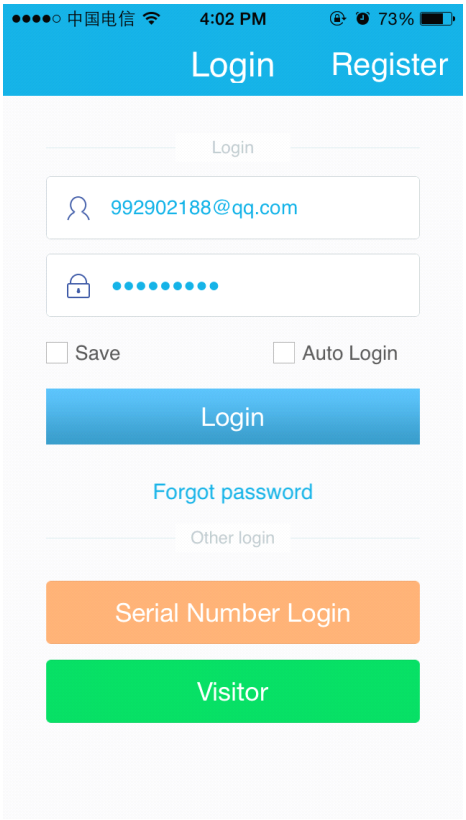
●●●●○ 中国电信 4:02 PM 73%
Login
Register
Login
992902188@qq.com
Save
Auto Login
Login
Forgot password
Other login
Serial Number Login
Visitor

④

LONGSE

2.Add Device

2.1、Use SN code add IPC/NVR/DVR.

After the first successful login FREEIP , the system will be prompted to add device , click “ add device” directly,system will automatic startup QR code scanning state。At this time only need to place the QR code icon in the scanning area, the system will automatically identify. As shown below:

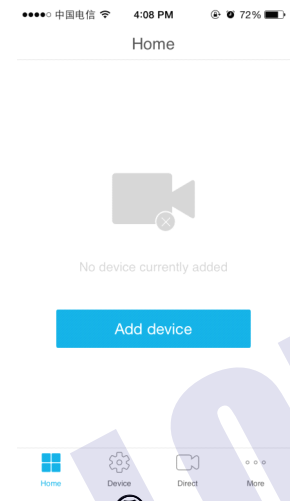

⑤

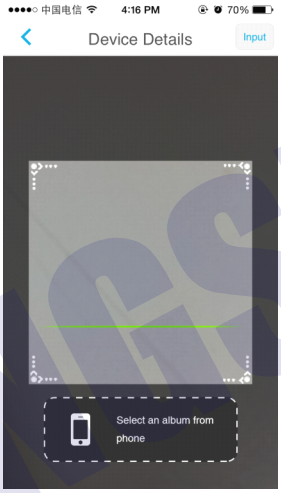

⑥

⑦

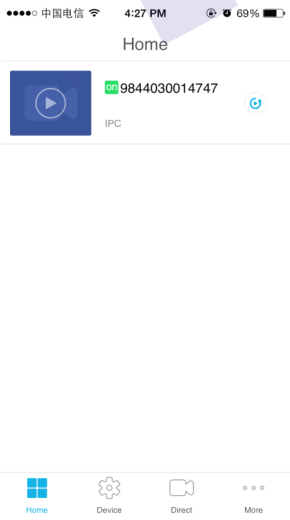

⑧

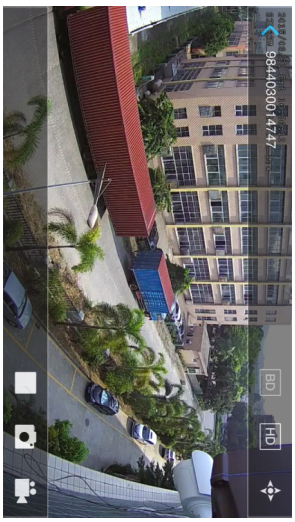

⑨

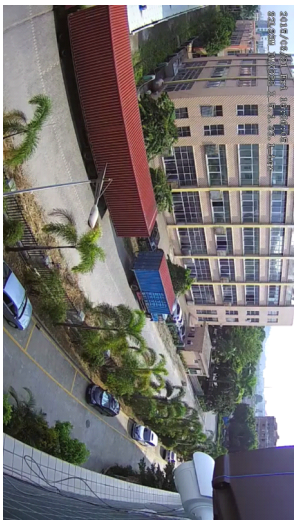

⑩

LONSE

2.2、Manage Device

Click 管理 ,and enter into the device management menu。Executed to add multiple devices,, delete and modify device name。As shown below:

2.2.1、How to add multiple devices;

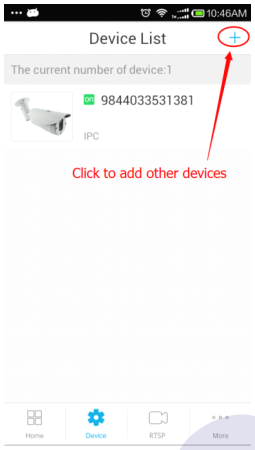

Pic 1

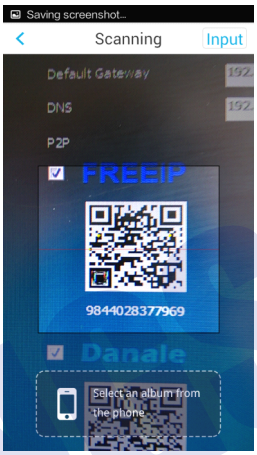

Pic 2

Pic 3

2.2.2、Delete Device;

Click on the selected device you need to delete, and click 【delete】 on the jump page

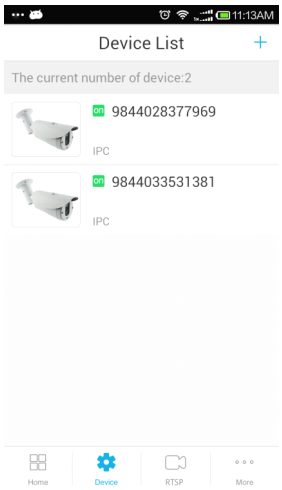

Pic 4

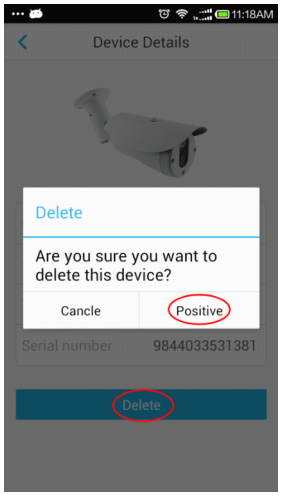

Pic 5

Pic 6

LONSE

2.2.3、Device name modification

Click on the selected device you need to modify, edit on the “device name”。

Pic 7

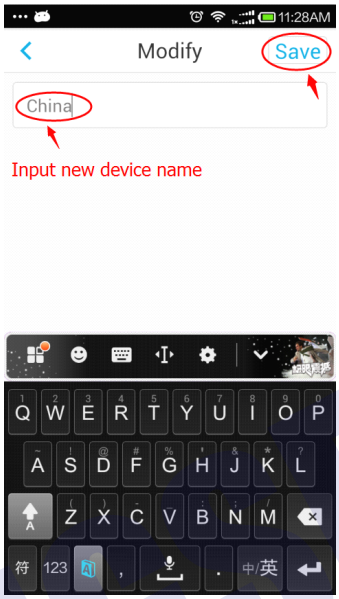

Pic 8

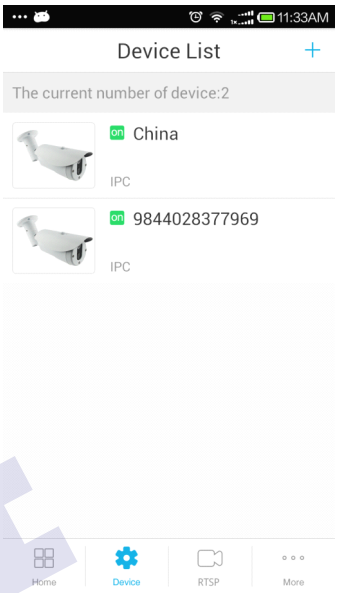

Pic 9

2.3、Use RTSP port add IPC/NVR/DVR.

Click Direct to enter into operation interface, And click “Add device”, first select “Device type” of your currect device, input “Device name”, fill in the device IP address in address bar , and fill in the RTSP port value of the current device in the port bar,and fill in account and password of the current device in the userName and Password. Click the “Save” button after fill in the correct information. (**Note: you must ensure that the iPhone and devices in the same local area network (LAN)**)

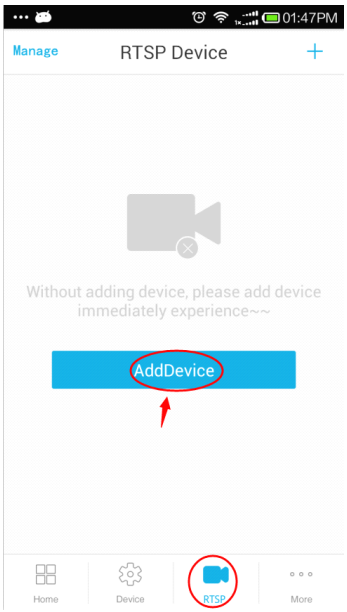

Pic 10

Pic 11

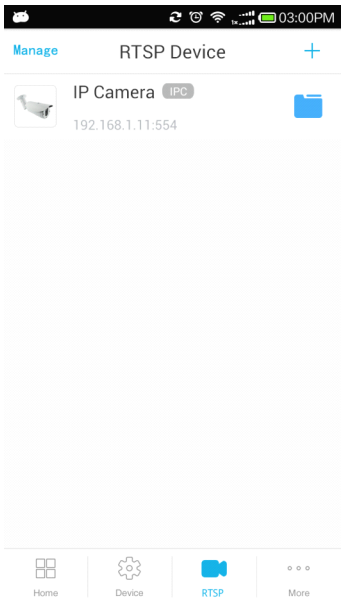

Pic 12

2.4 user【LAN Search】to add IPC/NVR/DVR

Click to enter into operation interface, And click 【Add device】 next click【LAN Search】finally click to add direct. As shown below: (**Note: you must ensure that the iPhone and devices in the same local area network (LAN)**)

LONGSE

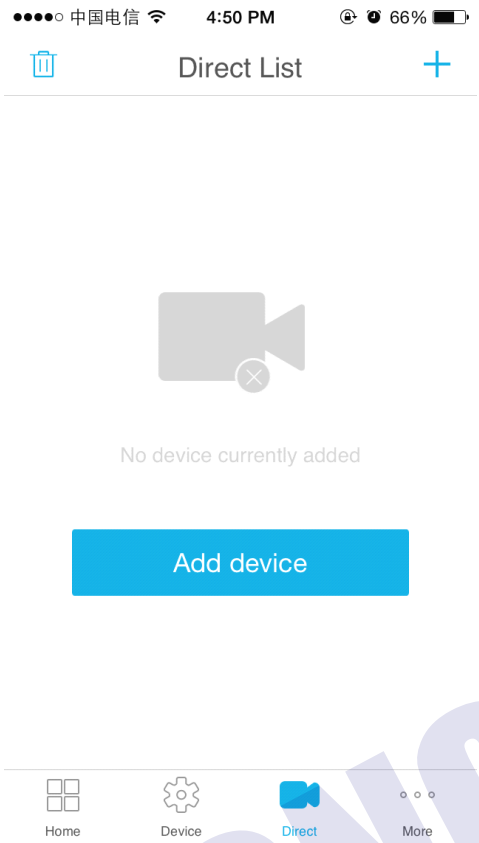

Pic 13

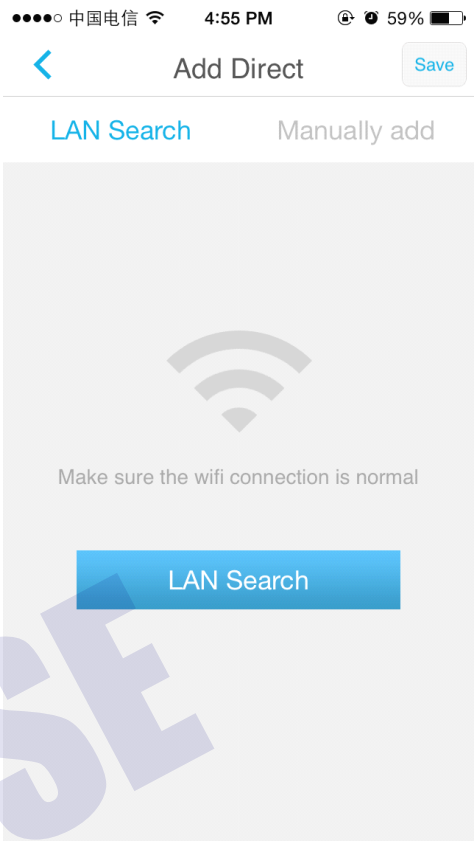

Pic14

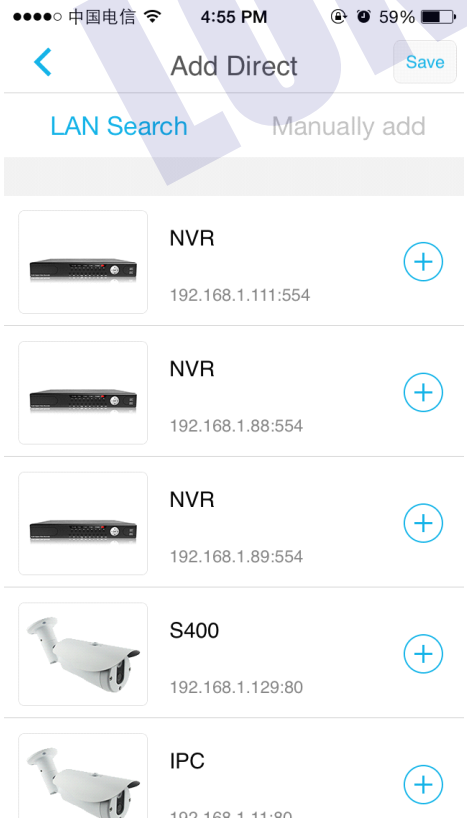

Pic15

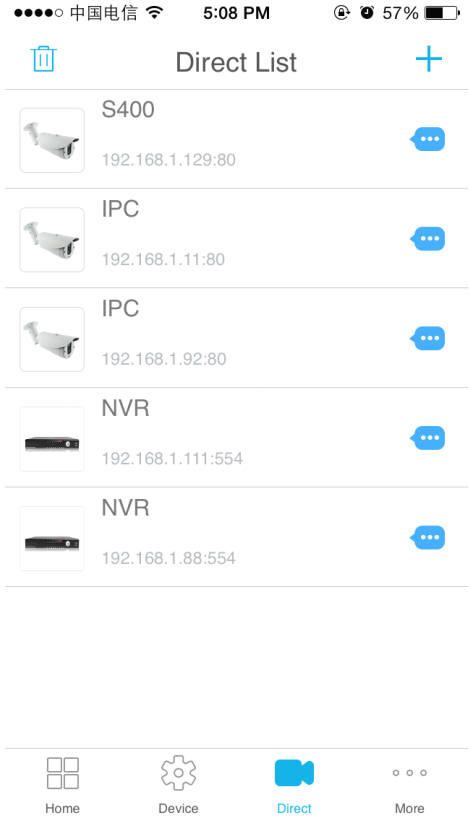

Pic16

LONGSE

3.Functions Introduction

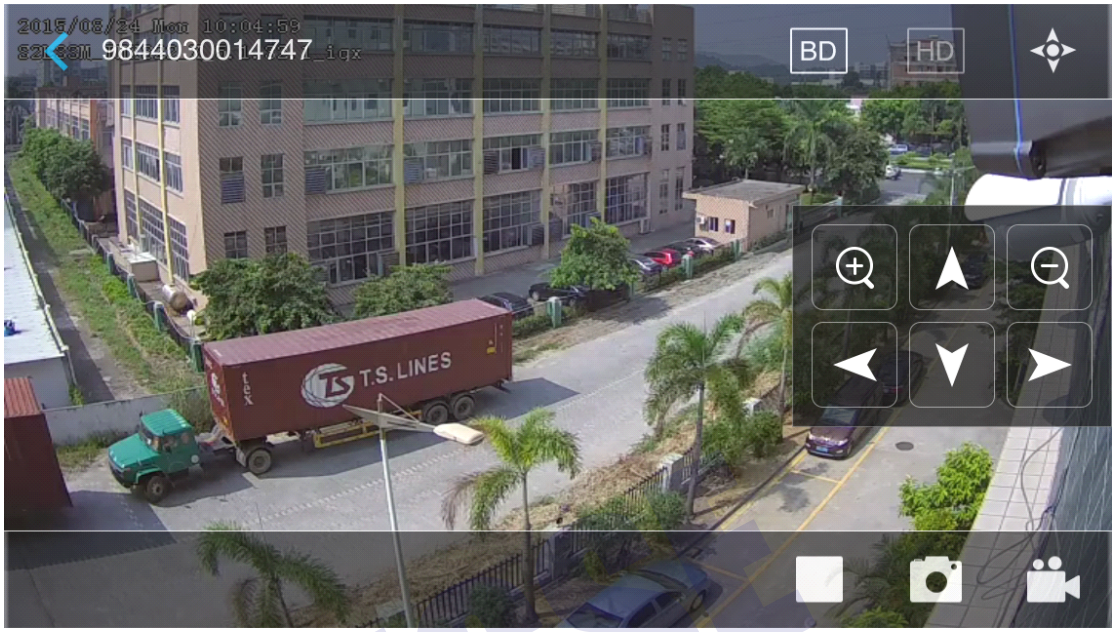

button	function
	Return to the higher level menu
	Blu-ray Disc
	High Definition
	PTZ control
	:zoom in : zoom out : up : left : down : right
	Stop
	Capture
	Record
	Play

LONGSE

4.Playback

Step 1:Click【More】to enter into operation interface

Step 2: Click【Pictures】into choice the Record video which you want to playback.

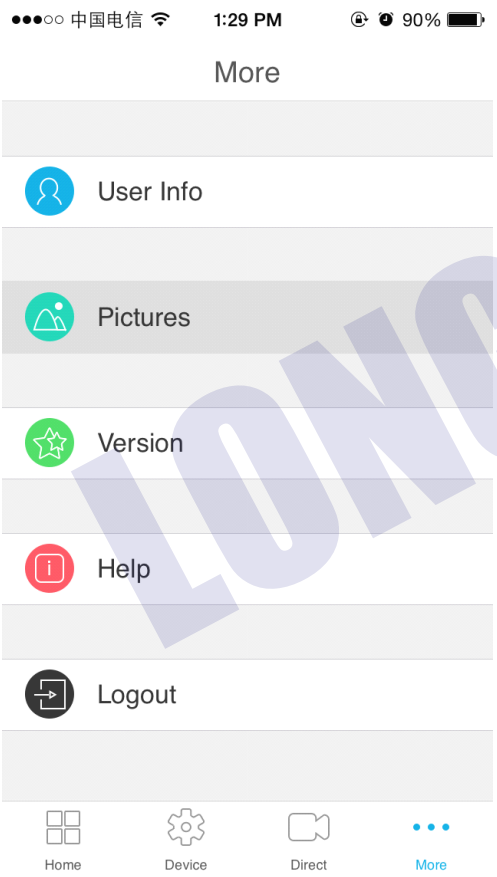

Pic17

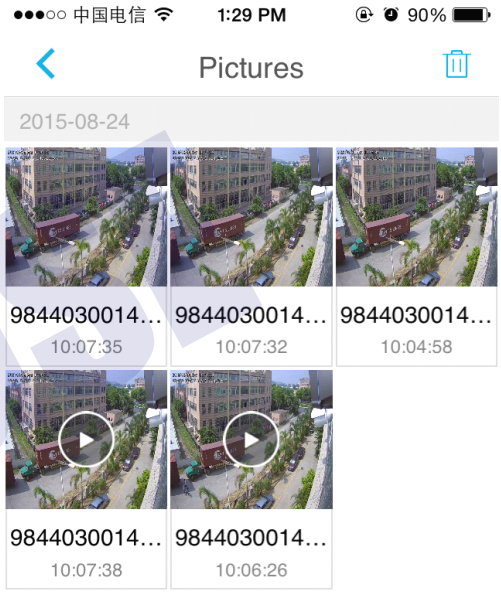

Pic18

5.FAQ

1、 FREEIP installation requirements on the mobile operating system?

Answer: Android smart phone operating system Android 2.3.3 versions and above all can install.

2、Which mailbox support to register account?

Answer: To meet the demand of customers support, FREEIP server support the application registration of multiple valid mailboxes on the internet.

3、 The registered account can be log in on different mobile phone at the same time?

Answer: A same registered account can realize to log in and preview at different mobile phones at the same time.

4、When scan the QR code to add device, it shows " the device has been binding". What happened?

Answer: FREEIP system stipulated one device can only added by one account, can not added by multiple registered accounts at the same time.

5、Why the added device appears to disconnect during previewing?

Answer: Please check the network status of the device and mobile phone, ensure smooth network status. Try to preview at the BD status. And we suggest to use WIFI when preview at the HD status.

6、My mobile language is foreign language, why can not open FREEIP?

Answer: FREEIP system only support Chinese and English language at present.

LONGSE